

Manual Cartridge Override


1. Remove cartridge not displaying on dashboard, remove the RFID tag located on the cartridge.

Note: The RFID tag **MUST** be removed to complete manual override.


2. Clean upper nozzle before completing remaining steps.
3. From Summary screen tap details/dashboard button
4. Select the ingredient card where the cartridge was removed.

Note: Double cartridges select the left ingredient card

5. The screen below will automatically display RFID Cartridge Override.

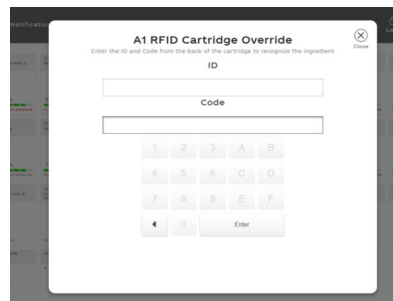

6. Enter the ID and Code from the cartridge removed, then select "Enter".

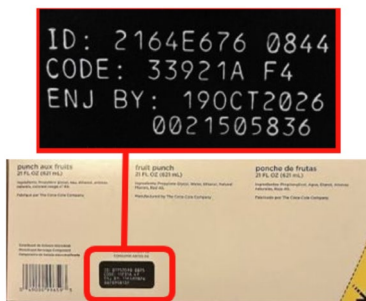

7. Insert cartridge into slot, then close the door. Ingredient card will change to orange, and the prime button will no longer appear as greyed out.



8. Tap prime button on the screen to prime ingredient.
9. Confirm cartridge has been primed and fuel gauge is displaying 100%.
Note: The fuel gauge will display as 100% regardless of actual amount of product of a partial cartridge.



10. Return to CUI to confirm drink is ready to pour (no longer grayed out on screen).
Important - The fuel gauge reading will not match the volume remaining in the cartridge and that the cartridge will need to be changed once the ingredient screen displays sold out.